

SPECIFICATIONS

A225-01-01B

ITEMS		MODEL	HWS30 -3	HWS30 -5	HWS30 -12	HWS30 -15	HWS30 -24	HWS30 -48	
1	Nominal Output Voltage	V	3.3	5	12	15	24	48	
2	Maximum Output Current	A	6	6	2.5	2	1.3	0.65	
3	Maximum Output Power	W	20	30	30	30	31.2	31.2	
4	Efficiency (Typ) (*1)	100VAC	%	70	77	81	81	83	82
		200VAC	%	73	80	83	83	86	83
5	Input Voltage Range (*2)	-	85 ~ 265VAC (47 ~ 63Hz) or 120 ~ 370VDC						
6	Input Current (100/200VAC)(Typ) (*1)	A	0.6/0.3	0.8/0.4					
7	Inrush Current(Typ) (*3)	-	14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start						
8	PFHC	-	Built to meet IEC61000-3-2						
9	Output Voltage Range	V	2.97~3.96	4.0~6.0	9.6~14.4	12.0~18.0	19.2~28.8	38.4~52.8	
10	Maximum Ripple & Noise (*4)	0≤Ta<70°C	mV	120	120	150	150	200	200
		10≤Ta< 0°C	mV	160	160	180	180	240	240
11	Maximum Line Regulation (*5)	mV	20	20	48	60	96	192	
12	Maximum Load Regulation (*6)	mV	40	40	96	120	192	384	
13	Temperature Coefficient	-	Less than 0.02% / °C						
14	Over Current Protection (*7)	A	6.3 ~	6.3 ~	2.62 ~	2.1 ~	1.36 ~	0.68 ~	
15	Over Voltage Protection (*8)	V	4.13~4.95	6.25~7.25	15.0~17.4	18.8~21.8	30.0~34.8	55.2~64.8	
16	Hold-up Time (Typ) (*9)	-	20ms						
17	Leakage Current (*10)	-	Less than 0.5mA. 0.2mA(Typ) at 100VAC / 0.4mA(Typ) at 230VAC						
18	Remote Sensing	-	-						
19	Parallel Operation	-	-						
20	Series Operation	-	Possible						
21	Operating Temperature (*11)	-	-10 ~+70°C (-10 ~+50°C:100%,+60°C:60%,+70°C:20%)						
22	Operating Humidity	-	30 ~ 90%RH (No dewdrop)						
23	Storage Temperature	-	-30 ~ +85°C						
24	Storage Humidity	-	10 ~ 95%RH (No dewdrop)						
25	Cooling	-	Convection Cooling						
26	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (100mA) for 1min						
27	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC						
28	Vibration	-	At no operating, 10 ~ 55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.						
29	Shock (In package)	-	Less than 196.1m/s ²						
30	Safety (*12)	-	Approved by UL60950-1, CSA60950-1, EN60950-1, EN50178 Built to meet UL508, DENAN						
31	Line DIP	-	Built to meet SEMI-F47 (200VAC Line only)						
32	Conducted Emission	-	Built to meet EN55011/EN55022-B, FCC-B, VCCI-B						
33	Radiated Emission	-	Built to meet EN55011/EN55022-B, FCC-B, VCCI-B						
34	Immunity	-	Built to meet IEC61000-4-2(Level 2,3), -3(Level 3), -4(Level 3), -5(Level 3,4), -6(Level 3), -8(Level 4), -11						
35	Weight(Typ.)	-	220g						
36	Size (W x H x D)	mm	26.5 x 82 x 95 (Refer to Outline Drawing)						

*Read instruction manual carefully, before using the power supply unit.


=NOTES=

- *1. At 100/200VAC, Ta=25°C and maximum output power.
- *2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 ~ 240VAC(50/60Hz).
- *3. Not applicable for the in-rush current to Noise Filter for less than 0.2ms.
- *4. Measure with JEITA RC-9131A probe, Bandwise of scope :100MHz.
For start up at low ambient temperature and low input voltage, output ripple noise might not meet specification.
However, there is no overshoot at start up and output ripple noise specification can be met after one second.
- *5. 85 ~ 265VAC , constant load.
- *6. No load-Full load, constant input voltage.
- *7. Foldback current limit with automatic recovery. Not operate at over load or dead short condition for more than 30second
- *8. OVP circuit will shutdown output, manual reset (Re power on).
- *9. At 100/200VAC , Ta=25°C, nominal output voltage and maximum output current.
- *10. Measured by the each measuring method of UL,CSA,EN and DENAN(at 60Hz).
- *11. Ratings - Derating at standard mounting.
- Load (%) is percent of maximum output power or maximum output current, whichever is greater.
- As for other mountings, refer to derating curve (A225-01-02_).
- *12. As for DENAN, built to meet at 100VAC.


OUTPUT DERATING

A225-01-02

Ta(°C)	LOAD(%)
	MOUNTING A,B,C,D
-10 ~+30	100
40	100
50	100
60	60
70	20

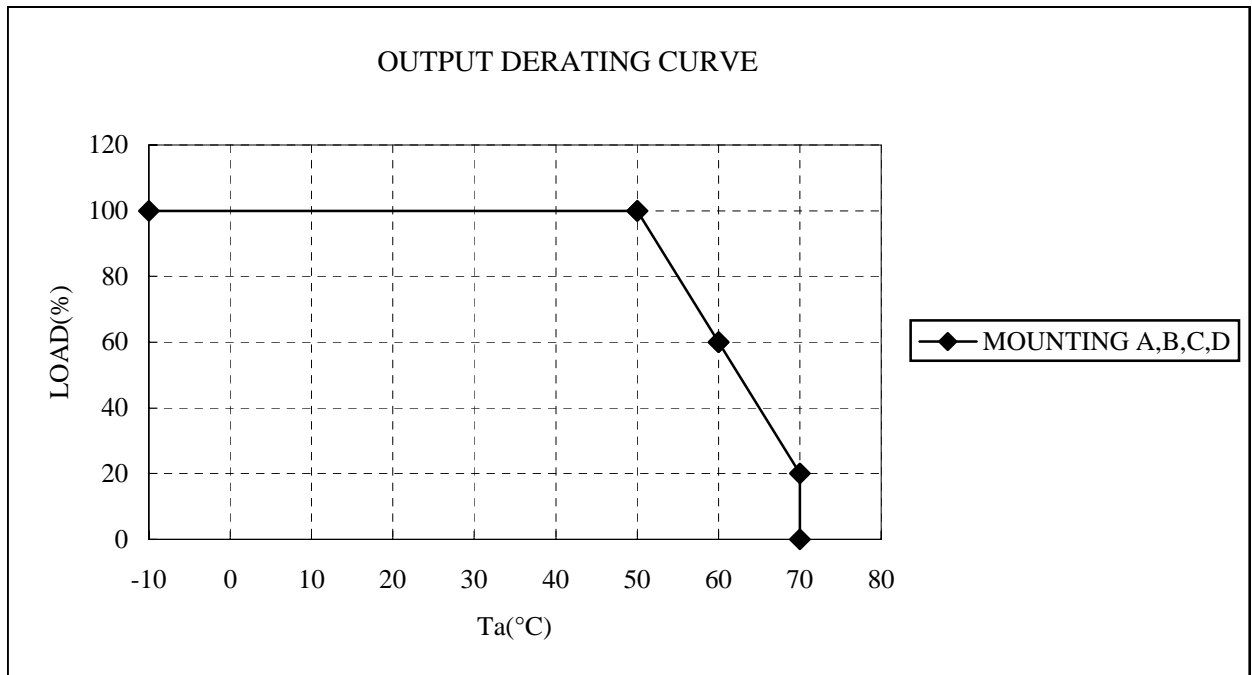

MOUNTING A
MOUNTING B
MOUNTING C
MOUNTING D
DON'T USE

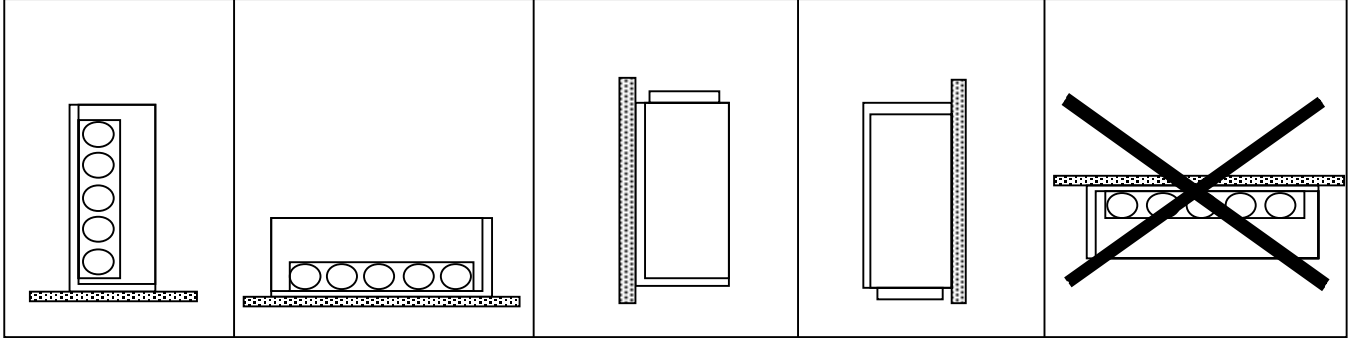

(STANDARD MOUNTING)

SPECIFICATIONS

A225-01-03

ITEMS		MODEL	HWS30-9
1	Nominal Output Voltage	-	9V
2	Maximum Output Current	-	3.4A
3	Maximum Output Power	-	30.6W
4	Efficiency (Typ) (*1)	100VAC	78%
		200VAC	81%
5	Input Voltage Range (*2)	-	85 - 265VAC (47 - 63Hz) or 120 - 370VDC
6	Input Current (100/200VAC)(Typ) (*1)	-	0.8A/0.4A
7	Inrush Current(Typ) (*3)	-	14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start
8	PFHC	-	Designed to meet IEC61000-3-2
9	Output Voltage Range	-	7.2V-10.8V
10	Maximum Ripple & Noise (*4)	0≤Ta<70°C	150mV
		10≤Ta<0°C	180mV
11	Maximum Line Regulation (*5)	-	36mV
12	Maximum Load Regulation (*6)	-	72mV
13	Temperature Coefficient	-	Less than 0.02% / °C
14	Over Current Protection (*7)	-	3.57A <
15	Over Voltage Protection (*8)	-	11.25V-13.05V
16	Hold-up Time (Typ) (*9)	-	20ms
17	Leakage Current (*10)	-	Less than 0.5mA. 0.2mA(Typ) at 100VAC / 0.4mA(Typ) at 230VAC
18	Remote Sensing	-	-
19	Parallel Operation	-	-
20	Series Operation	-	Possible
21	Operating Temperature (*11)	-	-10 to +70°C (-10 to +50°C:100%,+60°C:60%,+70°C:20%)
22	Operating Humidity	-	30 to 90%RH (No dewdrop)
23	Storage Temperature	-	-30 to +85°C
24	Storage Humidity	-	10 to 95%RH (No dewdrop)
25	Cooling	-	Convection Cooling
26	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (100mA) for 1min
27	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC
28	Vibration	-	At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.
29	Shock (In package)	-	Less than 196.1m/s ²
30	Safety (*12)	-	Designed to meet UL60950-1, CSA60950-1, EN60950-1, EN50178, UL508, DENAN
31	Line DIP	-	Designed to meet SEMI-F47 (200VAC Line only)
32	Conducted Emission	-	Designed to meet EN55011/EN55022-B, FCC-B, VCCI-B
33	Radiated Emission	-	Designed to meet EN55011/EN55022-B, FCC-B, VCCI-B
34	Immunity	-	Designed to meet IEC61000-4-2(Level 2,3), -3(Level 3), -4(Level 3), -5(Level 3,4), -6(Level 3), -8(Level 4), -11
35	Weight(Typ.)	-	220g
36	Size (W x H x D)	mm	26.5 x 82 x 95 (Refer to Outline Drawing)

*Read instruction manual carefully, before using the power supply unit.

=NOTES=

- *1. At 100/200VAC, Ta=25°C and maximum output power.
- *2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50/60Hz).
- *3. Not applicable for the in-rush current to Noise Filter for less than 0.2ms.
- *4. Measure with JEITA RC-9131A probe, Bandwidth of scope :100MHz.
For start up at low ambient temperature and low input voltage, output ripple noise might not meet specification.
However, there is no overshoot at start up and output ripple noise specification can be met after one second.
- *5. 85 - 265VAC , constant load.
- *6. No load-Full load, constant input voltage.
- *7. Foldback current limit with automatic recovery. Not operate at over load or dead short condition for more than 30second
- *8. OVP circuit will shutdown output, manual reset (Re power on).
- *9. At 100/200VAC , Ta=25°C, nominal output voltage and maximum output current.
- *10. Measured by the each measuring method of UL,CSA,EN and DENAN(at 60Hz).
- *11. Ratings - Derating at standard mounting.
- Load (%) is percent of maximum output power or maximum output current, whichever is greater.
- As for other mountings, refer to derating curve (A225-01-02_).
- *12. As for DENAN, designed to meet at 100VAC.